



FLOR P/G

FFLPB3 - BIANCO - WHITE

TECHNICAL DATA

Watt: 60W

Lumen: 4300lm

Color temperature: 3000K

Volt: 220-240V

IP: IP20

CRI: >80

Life: 30.000h


Class: Classe 1

Montatura in alluminio satinato bianco. Diffusore in metacrilato bianco opale. Sorgente luminosa led dimmerabile a taglio di fase tramite dimmer esterno+push (non inclusi).

White satin finish aluminium frame. White opal methacrylate diffuser. Phase cut dimmable LED light source via external dimmer+push (not included).

Monture en aluminium satiné blanc. Diffuseur en méthacrylate blanc opale. Source lumineuse LED à gradation de phase via un variateur externe+poussoir (non inclus).

Weißer satiniertes Aluminiumrahmen. Opalweißer Methacrylat-Diffusor. Phasenanschnitt dimmbare LED-Lichtquelle über externen Dimmer+Push (nicht enthalten).

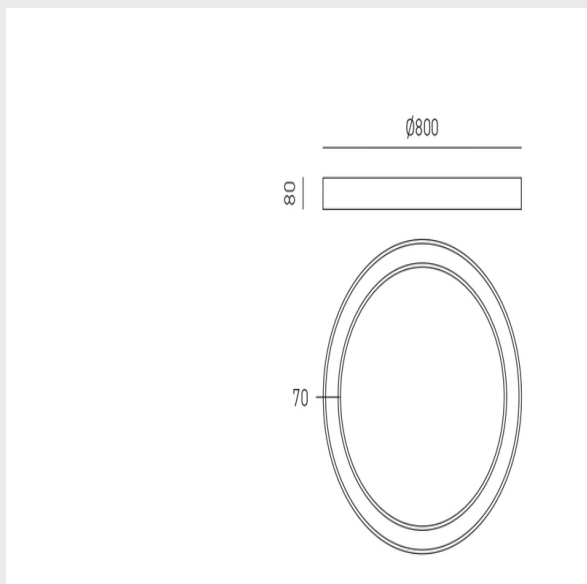



FLOR P/G

FFLPN3 - NERO - BLACK

TECHNICAL DATA

Watt: 60W

Lumen: 4100lm

Color temperature: 3000K

Volt: 220-240V

IP: IP20

CRI: >80

Life: 30.000h


Class: Classe 1

Montatura in alluminio satinato nero. Diffusore in metacrilato bianco opale. Sorgente luminosa led dimmerabile a taglio di fase tramite dimmer esterno+push (non inclusi).

Black satin finish aluminium frame. White opal methacrylate diffuser. Phase cut dimmable LED light source via external dimmer+push (not included).

Monture en aluminium noir satiné. Diffuseur en méthacrylate blanc opale. Source lumineuse LED à gradation de phase via un variateur externe+poussoir (non inclus).

Schwarzer satiniertes Aluminiumrahmen. Opalweißer Methacrylat-Diffusor. Phasenanschnitt dimmbare LED-Lichtquelle über externen Dimmer+Push (nicht enthalten).

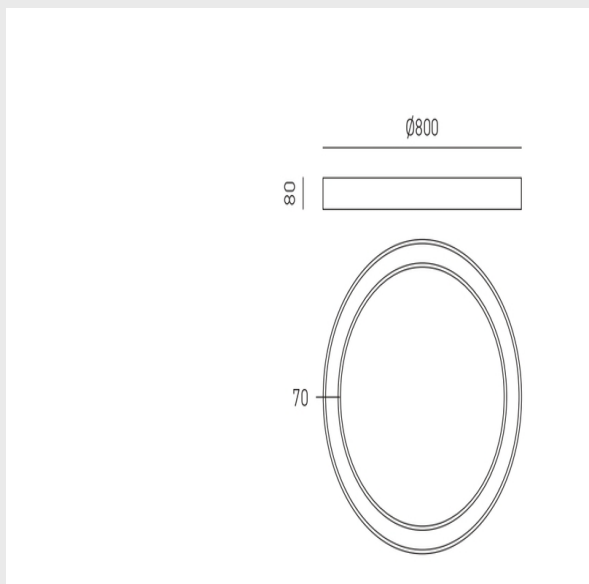



FLOR P/G

FFLPO3 - ORO-SPAZZOLATO - BRUSHED GOLD

TECHNICAL DATA

Watt: 60W

Lumen: 4200lm

Color temperature: 3000K

Volt: 220-240V

IP: IP20

CRI: >80

Life: 30.000h

Class: Classe 1

Montatura in alluminio oro spazzolato. Diffusore in metacrilato bianco opale. Sorgente luminosa led dimmerabile a taglio di fase tramite dimmer esterno+push (non inclusi).

Brushed gold finish aluminium frame. White opal methacrylate diffuser. Phase cut dimmable LED light source via external dimmer+push (not included).

Monture en aluminium doré brossé. Diffuseur en méthacrylate blanc opale. Source lumineuse LED à gradation de phase via un variateur externe+poussoir (non inclus).

Gebürsteter goldener Aluminiumrahmen. Opalweißer Methacrylat-Diffusor. Phasenanschnitt dimmbare LED-Lichtquelle über externen Dimmer+Push (nicht enthalten).

